


Trash Doors

TRASH CHUTE Intake Door

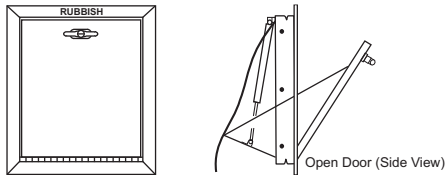


Doors are fabricated with 22 gauge type 304 stainless steel and stainless hinges. Doors are bottom hinged, self closing and self latching with a locking Tee handle. UL class B labeled: 1½ hour fire rated with 30-minute temperature rise of 250° F. Door trim embossed "RUBBISH".

RECOMMENDED DOOR SIZES

Chute Size	Door Size W x H
24" Diameter Chute	15" x 18" Door
30" Diameter Chute	18" x 18" Door
36" Diameter Chute	21" x 18" Door

TRASH CHUTE Discharge Door

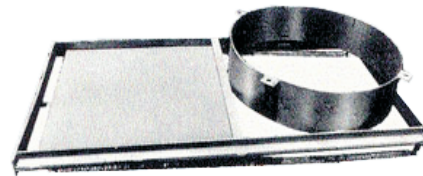


Horizontal rolling type discharge door assembly, required when chute discharges into an open container. Gravity rolling door held open with a UL approved 165° fusible link.

RECOMMENDED DOOR SIZES

Chute Size	Door Size W x H
24" Diameter Chute	26½" x 50½" Door
30" Diameter Chute	32½" x 62½" Door
36" Diameter Chute	38½" x 74½" Door

Linen Doors

LINEN CHUTE Intake Door

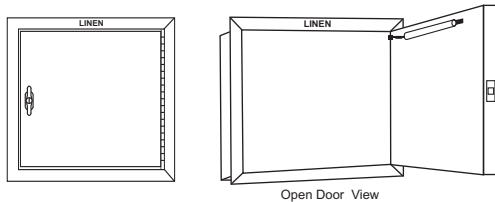

Doors are fabricated with 22 gauge type 304 stainless steel and stainless steel hinges. Doors are side hinged, self closing, and self latching with a locking Tee handle. UL class B labeled: 1½ hour fire rated with 30-minute temperature rise of 250° F. Door trim embossed "LINEN".

RECOMMENDED DOOR SIZES

Chute Size	Door Size W x H
24" Diameter Chute	18" x 18" Door
30" Diameter Chute	21" x 21" Door
36" Diameter Chute	24" x 24" Door

LINEN CHUTE Discharge Door



Top hinged stainless steel door panel held open with a UL approved 165° fusible link. Equipped with two positive latching handles, adjustable support legs, and drain assembly.

RECOMMENDED DOOR SIZES

Chute Size	Door Size W x H
24" Diameter Chute	18" x 18" Door
30" Diameter Chute	21" x 21" Door
36" Diameter Chute	24" x 24" Door